



**Portable multi-gas  
monitoring made easy**

# Impulse X4



## Tough Durable Housing

- Small and lightweight
- Rugged, impact and weather resistant
- Includes crocodile - prevents accidental loss

## Easy to Use

- Works straight out of the box
- Single button on/off operation
- Intuitive icons suitable for all languages
- User configurable via menu
- Interactive product training guide available

## Ultra Clear Backlit Display

- Unique 'flip display' at the press of a button
- Continuous reading of gas levels
- TWA/STEL and two instantaneous alarm levels with peak hold facility
- Battery life, calibration and self-test status

## Effective Gas Alarm Indication

- Alarm and backlight combine to demand attention
- Distinctive loud two-tone audible alarm
- Vibrating alarm supplied as standard

## Reliable Operation

- Self-test on start up or on demand checks display, battery, sensor, audiovisual and vibrating alarms
- Uses patented SureCell™ sensor technology and Reflex™ cell check technique
- Includes TempraSURE™ thermal compensation and shock protection
- Periodic flash and/or beep for increased confidence (user configurable)

## Unsurpassed RFI Performance

- Can be used alongside walkie-talkies or cell phones
- Exceeds the toughest industrial standards for RFI immunity

## Cost Effective:

- Fully inclusive 2 year warranty
- Minimum 2 year sensor life
- Initial and on-going running costs minimized
- Available in 1, 2, 3 or 4 gas versions

**Impulse X4 is an unsurpassed portable gas detector for protection against flammable, oxygen, carbon monoxide and hydrogen sulphide gas hazards. It's ideal for use by those companies wanting advanced performance, reliability and ease of use without high costs of long term maintenance.**

Impulse X4 focuses on ease of use by offering only the functionality required to comply with legislation.

Everything that a user routinely has to do can be achieved with a single button press! Keeping it simple reduces training requirements and enables use in a wider range of industries.

Ease of use doesn't mean basic functionality.

For example, every instrument has the capability to log data using a simple to fit memory card (the type you get in a digital camera). Events, gas data and the calibration history are all stored and the free software downloaded from our web site enables you to graph or print reports at the press of a button.

Convenience and the way users want to work is an important consideration. When clipped to the belt or harness users may want the re-assurance of being able to view the display from different positions. But with many other units the display is upside down forcing the user to remove the unit to look at the display, perhaps creating a hazard. With the Impulse X4 users can 'flip' the display at the press of a button for that added convenience and safety.

With an ultra clear backlit display, vibrating and powerful audiovisual alarms, the ImpulseX4 demands attention when gas hazards are detected in even the most adverse working conditions. All in all, Impulse X4 offers reliable, easy to use gas detection to keep you safe.



# General Specification




| Standard Specification  |                |                               |         |         |        |
|---|----------------|-------------------------------|---------|---------|--------|
| General   |                |                               |         |         |        |
| Reusable multi-gas detector for personal protection against flammable, toxic and oxygen gas hazards. Supplied complete with calibration certificate, quick start guide, alkaline batteries (2), tubing, flow adaptor, crocodile clip, and manual. |                |                               |         |         |        |
| Gases Detected  | Range          | Alarm Set Points <sup>#</sup> |         |         |        |
|   |                | Level 1                       | Level 2 | STEL    | TWA    |
| Flammable (Exp)   | 0 to 100% LEL* | 10% LEL                       | 20% LEL | n/a     | n/a    |
| Oxygen (O <sub>2</sub> )  | 0 to 30% vol   | 23% vol                       | 19% vol | n/a     | n/a    |
| Carbon Monoxide (CO)  | 0 to 999 ppm   | 35 ppm                        | 400 ppm | 200 ppm | 30 ppm |
| Hydrogen Sulfide (H <sub>2</sub> S)   | 0 to 250 ppm   | 10 ppm                        | 40 ppm  | 10 ppm  | 5 ppm  |
| * Flammable channel can display gas concentration in %vol units for a range of flammable gases.<br># User configurable.   |                |                               |         |         |        |
| Sensors   |                |                               |         |         |        |
| Patented Surecell™ electrochemical and catalytic bead sensing technology for stable and reliable performance in all industrial environments.  |                |                               |         |         |        |
| Diagnostics   |                |                               |         |         |        |
| Self-test of circuitry, battery, LCD, and sensors on start up or on demand.   |                |                               |         |         |        |
| Patented Reflexcell check techniques included as standard for toxic channels.   |                |                               |         |         |        |
| Display   |                |                               |         |         |        |
| Ultra clear icon driven backlit LCD displays gas level and detector status. Unique 'flip display' function at the press of a button for added user convenience. High/Low Peak hold facility included with user clear. Time and date.              |                |                               |         |         |        |
| User Interface  |                |                               |         |         |        |
| Intuitive three button operation for detector configuration.  |                |                               |         |         |        |
| Audible Alarm   |                |                               |         |         |        |
| 90 db @ 30 cm   |                |                               |         |         |        |
| Visual Alarm  |                |                               |         |         |        |
| High intensity red LEDs combined with red backlight for maximum effect.   |                |                               |         |         |        |
| Vibrating Alarm   |                |                               |         |         |        |
| Supplied as standard.   |                |                               |         |         |        |
| Operating Temperature   |                |                               |         |         |        |
| -20°C to +50°C (-4°F to +122°F).<br>TempraSURE temperature compensation.  |                |                               |         |         |        |
| Humidity  |                |                               |         |         |        |
| 5-95% RH (non-condensing).  |                |                               |         |         |        |
| IP Rating   |                |                               |         |         |        |
| Ingress protection to IP65.   |                |                               |         |         |        |
| Approvals   |                |                               |         |         |        |
| North America: Class I, Div 1, Groups A, B, C, D T4. Australia: SAA Ex ia s Zone 0 I/IIC T4<br>Europe: ATEX II 2G EEx ia d IIC T4. (T2 for rechargeables) Canada: certified to CSA C22.2-152 and C 22.2-157.                                      |                |                               |         |         |        |
| RFI/EMC   |                |                               |         |         |        |
| CE EN50270:1999 and EN55011.  |                |                               |         |         |        |
| Sensor Life   |                |                               |         |         |        |
| Minimum of 2 years backed by inclusive 2 year warranty.   |                |                               |         |         |        |
| Battery Life  |                |                               |         |         |        |
| 14-16 hours with 2 x AA Alkaline batteries. 12 hours of operation per charge, minimum, with rechargeable NiMH batteries. Low power audiovisual warning.   |                |                               |         |         |        |
| Dimensions  |                |                               |         |         |        |
| 124 mm(H) X 76 mm(W) X 36 mm(D).  |                |                               |         |         |        |
| Weight  |                |                               |         |         |        |
| 210 g (without batteries), 258 g (with batteries)   |                |                               |         |         |        |
| Warranty  |                |                               |         |         |        |
| 2 years   |                |                               |         |         |        |

## Optional Accessories

- Field case
- Belt clip
- Hand aspirator kit with inline filter
- Tubing (2 m/6')
- 1 m (3') sample probe
- 10 m (30') sample tubing with ball float
- Calibration gas (Balanced Air, CH<sub>4</sub> 50% LEL, CO 50 ppm, H<sub>2</sub>S 25 ppm)
- 0.3 L/min flow regulator
- Spare memory card for data logging (Refer to the manual for acceptable models and part numbers)
- Desktop USB memory card reader
- Data log graphing and reporting software
- Interactive training guide CD
- Data logging kit
- Confined space kit
- Calibration kit
- Bump Test gas cylinder
- NiMH Battery and AC charging kit
- Vehicle Charging Kit

\* Oxygen detection products must only be used to detect oxygen depletion in air.

## Display Details

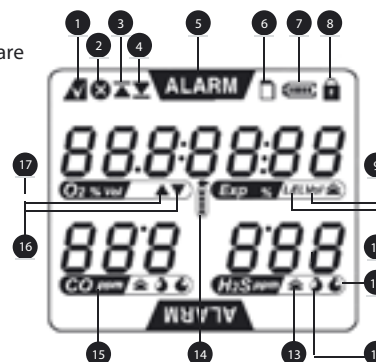

- 1 Test Pass Icon
- 2 Test Fail Icon
- 3 High Peak Icon
- 4 Low Peak Icon (for O<sub>2</sub> only)
- 5 Alarm Icon
- 6 Data Logging Icon
- 7 Battery Icon
- 8 Pass Code Protection Icon
- 9 %Vol Unit Icon
- 10 %LEL Unit Icon
- 11 STEL Icon
- 12 TWA Icon
- 13 Alarm Level 1 Icon (flame)  
Alarm Level 2 Icon (toxic)  
(for flammable and toxic)
- 14 Calibration Icon
- 15 Gas Label Icon
- 16 O<sub>2</sub> Deficiency Alarm Icon
- 17 O<sub>2</sub> Excess Alarm Icon

As World leaders in gas detection solutions, Honeywell Analytics' Neotronics range is best placed to provide the most efficient, practical and cost-effective equipment. Wherever personal protection is required, you can rely on our equipment to provide practical solutions and to help keep your business running safely.

## The Neotronics range of portable gas detection



Impulse XT



Impulse XP



Impulse X4



Impact and Impact Pro



Enforcer



Safelink

### Impulse range

The Impulse range provides personal single and multi-gas protection and operational compliance in industrial environments. They are ideal for people working in areas that are not easily accessible and/or where fixed detection systems are not installed or not practical.

Impact and Impact Pro are ideal for providing personal protection against gases in tough environments, especially in confined spaces where entry and exit may be difficult. The Impact range provides easy and economical means of personal gas detection to meet compliance requirements. The Safelink Entrant/Attendant function ensures safe working practices are followed.

The Enforcer helps you to easily (and cost-effectively) comply with regulations requiring the regular testing of instruments. Because it can calibrate Impact multi-gas monitors within less than two minutes, the instruments are always ready for use. It also reduces cost by avoiding the need for specialist knowledge and equipment, or sub-contracting to expensive third parties, which also adds delays.

Safelink adds an extra safety dimension, enabling two-way communication in difficult areas. Easy to use, the system links two Impact Pro multi-gas monitors together, allowing a co-worker in a confined space to be monitored remotely, as well as providing a way of exchanging messages.

### Find out more

[www.honeywellanalytics.com](http://www.honeywellanalytics.com)

### Customer business centre

#### Europe and the rest of the world

Honeywell Analytics AG  
 Wilstrasse 11-U11  
 CH-8610 Uster  
 Switzerland  
 Tel: +41 (0)44 943 4300  
 Fax: +41 (0)44 943 4398  
[sales@zelana.co.uk](mailto:sales@zelana.co.uk)

### Customer business center

#### Americas

Honeywell Analytics Distribution, Inc.  
 400 Sawgrass Corporate Pkwy  
 Suite 100  
 Sunrise, FL 33325  
 USA  
 Tel: +1 954 514 2700  
 Toll free: +1 800 538 0363  
 Fax: +1 954 514 2784  
[sales@zelana.com](mailto:sales@zelana.com)

[www.honeywell.com](http://www.honeywell.com)

#### Please Note:

While every effort has been made to ensure accuracy in this publication, no responsibility can be accepted for errors or omissions. Data may change, as well as legislation, and you are strongly advised to obtain copies of the most recently issued regulations, standards, and guidelines. This publication is not intended to form the basis of a contract.  
 © 2005 Honeywell Analytics

H\_Impulse X4\_DS0279\_V1  
 09/05  
 © 2005 Honeywell Analytics

**Honeywell**